

Import Trackers

There are several ways to import a tracker, its fields and its data:

1st Way: Import Tracker using its structure (own code)

Trackers

Trackers

Duplicate/Import Tracker

No Tabs

Duplicate Tracker

Name

Tracker

Dynamic tracker example

☐ Duplicate categories ☐ Duplicate permissions

Duplicate

Import

Import Structure

Raw data

☐ Preserve tracker ID

Note

Use "Tracker -> Export -> Structure" to produce this data.

Import

Click to expand

2nd way: Import Tracker using Profile/Yaml code

Import

Import Structure

Import From Profile/YAML

New Feature

Please note: Experimental - work in progress

YAML

Import

Toggle Highlighter

Click to expand

Export and Import of Tracker Fields

In the **Edit Fields** page (/tiki-admin_tracker_fields.php?trackerId=) you need to select all fields you want to export with the checkboxes, then at the bottom there is a dropdown where you select **Export Selected**.

Buttons: Edit This Tracker, Edit Fields, Trackers, View Items

Tracker fields | Import Tracker Fields

ID	Name	Type	List	Title	Search	Public	Mandatory	A
☒	20	Area	Drop Down	☒	☒	☐	☒	☒
☒	21	Equipment	Text Field	☒	☐	☐	☒	☒
☒	22	Description	Text Area	☒	☐	☐	☒	☒
☒	23	Estimated Costs	Computed Field	☒	☐	☐	☒	☒
☒	24	2013	Numeric Field	☒	☐	☐	☒	☒
☒	25	2014	Numeric Field	☒	☐	☐	☒	☒
☒	26	2015	Numeric Field	☒	☐	☐	☒	☒
☒	27	2016	Numeric Field	☒	☐	☐	☒	☒
☒	28	2017	Numeric Field	☒	☐	☐	☒	☒

Export Selected

Save All
Remove Selected
Export Selected

This will open a window with the code you need to copy, then paste in to the **Import Tracker Fields** tab.

Export

```
isPublic = y
isHidden = n
isMandatory = n
description =
descriptionIsParsed = n
[FIELD20]
fieldId = 20
name = 2017
persName = 2017
position = 90
type = n
options = 0,0,f,,0,d,c
isMain = n
isBVisible = y
isSearchable = n
isPublic = y
isHidden = n
isMandatory = n
description =
descriptionIsParsed = n
```

OK Cancel

Export Selected

Add Field

Tracker fields | Import Tracker Fields

Raw Fields


```
[FIELD27]
fieldId = 27
name = 2016
persName = 2016
position = 80
type = n
options = 1,0,f,,0,d,c
isMain = n
isBVisible = y
isSearchable = n
isPublic = y
isHidden = n
isMandatory = n
description =
descriptionIsParsed = n
[FIELD28]
fieldId = 28
name = 2017
persName = 2017
position = 90
type = n
options = 0,0,f,,0,d,c
isMain = n
isBVisible = y
isSearchable = n
isPublic = y
isHidden = n
isMandatory = n
description =
descriptionIsParsed = n
```

☐ Preserve Field IDs

Import

Import Tracker data

To import data, you can import data through the other interface:

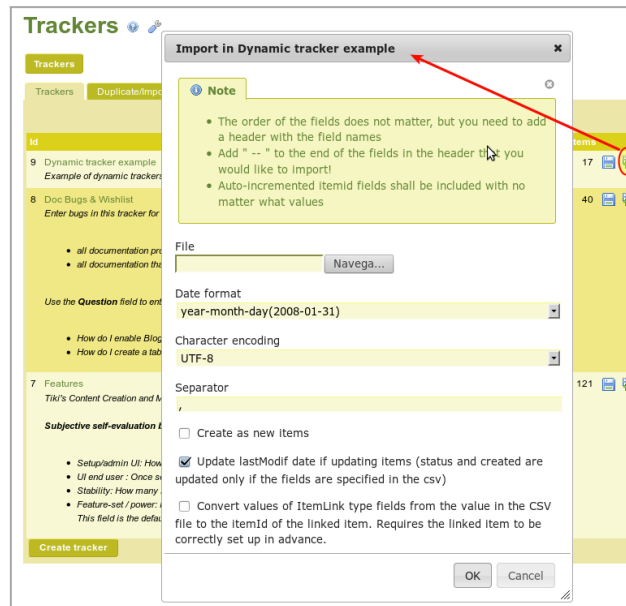

Click to expand

In order to get the right syntax for the file, you can export your tracker data first, so that you can see an example of how columns are data are formatted. See [Export Trackers](#).

Use from remote sources

You can alternatively use tracker data from remote sources through the **ODBC** read/write support added in [Tiki23](#).

See [ODBC](#)

Related

- [Trackers](#)
- [MultilingualTracker](#)
- [Export Trackers](#)
- [Tracker Import Export](#)
- [ODBC](#)

Alias names for this page

[Tracker Import](#) | [TrackerImport](#) | [Import Tracker](#) | [ImportTracker](#) | [ImportTrackers](#)